

BAT-SAFE – Setup instructions

1. To install charger stand:
 - a. Remove white backing from one side of the small Velcro and stick it on back of charger stand. Remove the counter side Velcro and stick it onto BAT-SAFE lid as shown.



- b. Slide tabs in vent holes and secure charger stand to back of BAT-SAFE lid via the small velcro.



- c. Add Velcro to face of charger stand and back of charger.




- d. Attach charger to charger stand via velcros.




2. Install wire way:


- a. Place charger wires between each half of wire way.

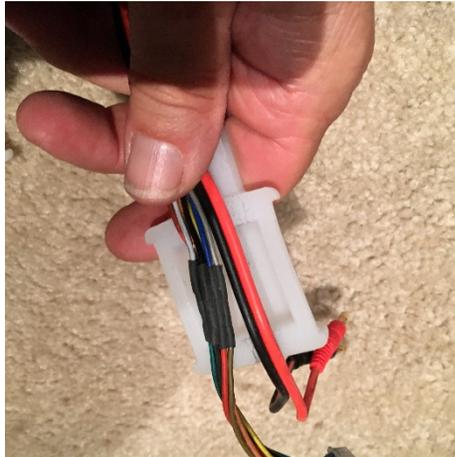

- b. Pull wire and wire way seal through opening in box lid as one unit.

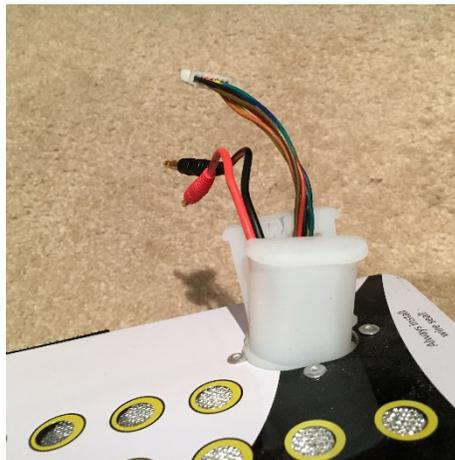

- c. Minimize gapping and ensure the upper and lower lip of the wire way is properly seated on outside of box lid.

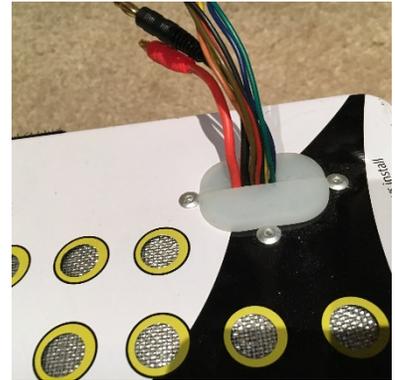

3. Charger wire hookup:

- a. Connect charger and balancing wires as usual. Ensuring wires do not pass over exhaust holes in lid.
- b. Hot exhaust from a battery fire can damage charger, do not allow charger or wires to hang over vent holes



4. Usage

- a. Place box on fire resistant surface ensure at least 12 inches or 30 cm of clear space above lid exists prior to using box.
- b. Place battery in box, hook up charging wires as normal. Removing friction feature on connectors can make plugging and unplugging of wires much easier.



- c. Close lid and latch



- d. Charge batteries as per normal charging instructions.



Be safe!